

Waiver:

This data sheet is for guidance only and must not be used for proper working drawings. Please contact supplier for particular details before proceeding. Owing to our policy of continual improvement we reserve the right to alter specifications and dimensions without prior notice.

SYSTEM 21


Machine Room-Less

Totally Machine Room Free

MRLi

13 Person (1000kg) Stretcher

Option: MRLi-EC
Machine Room-less
- Entrance Controller

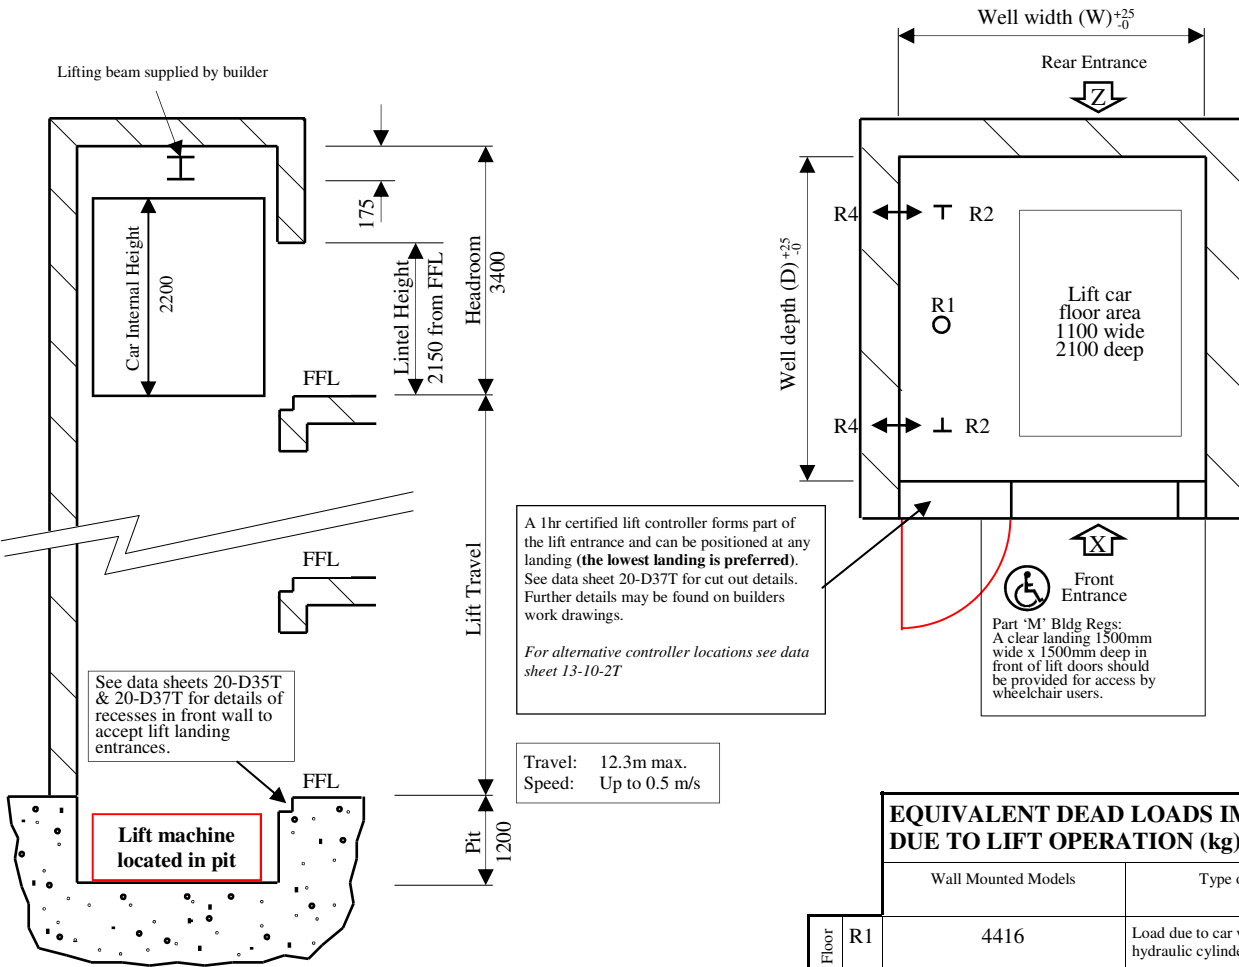

EQUIVALENT DEAD LOADS IMPOSED DUE TO LIFT OPERATION (kg)

		Wall Mounted Models	Type of Loading
Side Wall	Lift Pit Floor		
	R1	4416	Load due to car weight + load + hydraulic cylinder
	R2	4200	Load due to car buffering or safety gear operation
	R4	439	Push in/Pull out load

IMPORTANT

On Wall Mounted Models, Unistrut inserts ref P3270 to be built into lift pit and lift well walls by builder *before* installation. See specific Builder's Work Drawings for precise details.

WALL MOUNTED MODELS

MODEL REF	LIFT DOORS ARRANGEMENT	Plan Well Dimensions				Lift Car Clear Entrance			
		Front entrance X or Z		Front & rear entrance X & Z		W	H		
		Car Doors	Landing Doors	W	D	W	D	W	H
M13-1-2S 2S (800)		Auto 2 panel side opening 2S	Auto 2 panel side opening 2S	1650	2465	1650	2710	800	2000
M13-1-2S 2S (900)		Auto 2 panel side opening 2S	Auto 2 panel side opening 2S	1750	2465	1750	2710	900	2000
M13-1-2C 2C (800)		Auto 2 panel centre opening 2C	Auto 2 panel centre opening 2C	1800	2400	1800	2580	800	2000
M13-1-2C 2C (900)		Auto 2 panel centre opening 2C	Auto 2 panel centre opening 2C	2000	2400	2000	2580	900	2000

Note: Shaft sizes are for guidance purposes only and subject to change so it is crucial that you contact the supplier concerning your specific requirements.

Note: FX model (Structure Mounted) *not* available in this capacity. Wall Mounted only.

Machine Room-Less
MRLi
13-10-1T
05/01/09

Waiver:

This data sheet is for guidance only and must not be used for proper working drawings. Please contact supplier for particular details before proceeding. Owing to our policy of continual improvement we reserve the right to alter specifications and dimensions without prior notice.



SYSTEM 21

Machine Room-Less

Alternative Controller Locations (when not desired in the landing entrance as in 13-10-1T)

MRLi

13 Person (1000kg) Stretcher

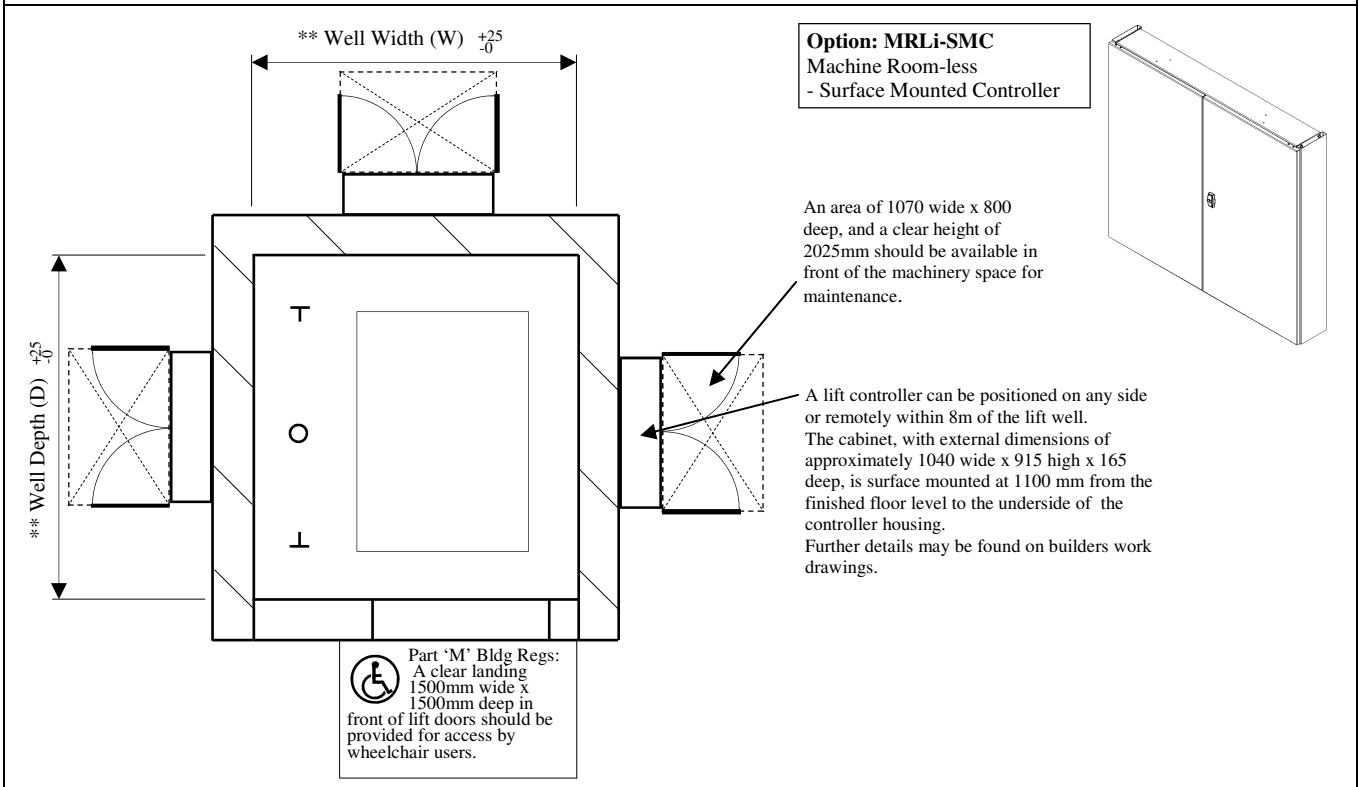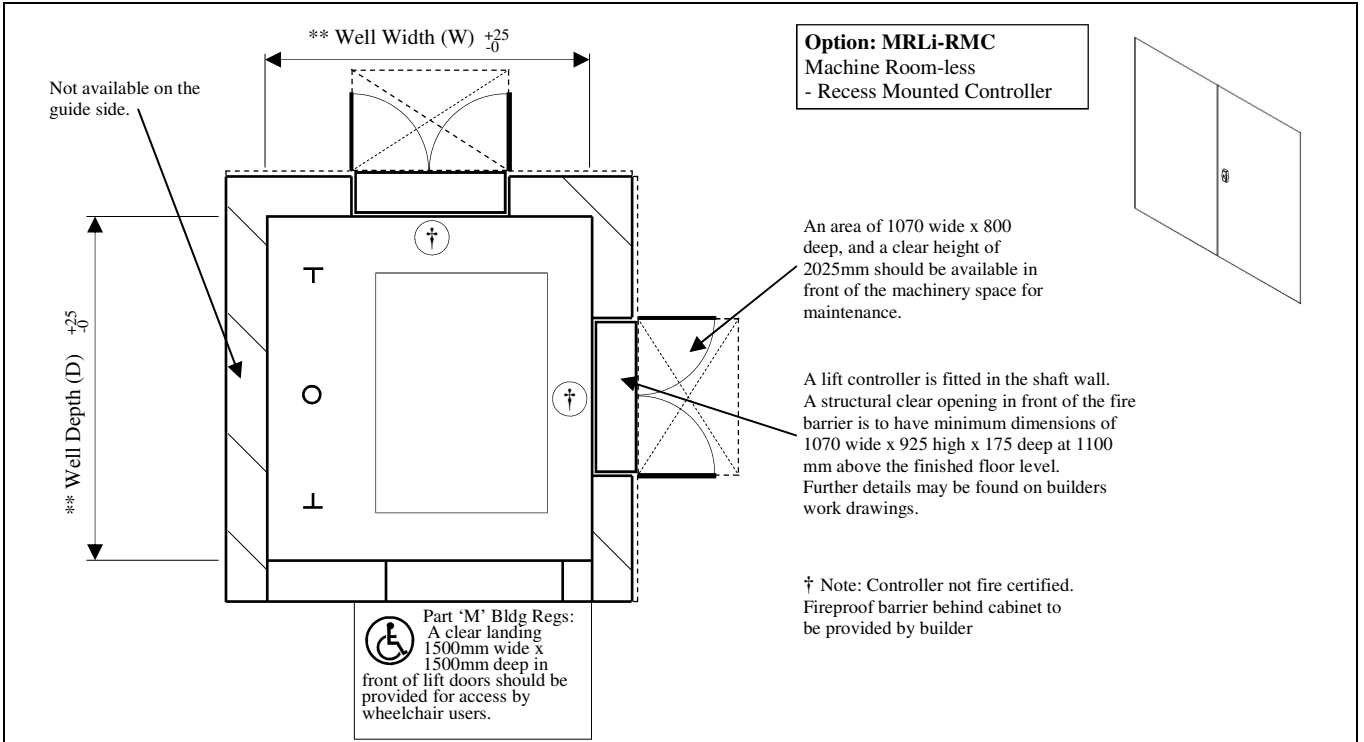

** See datasheet 13-10-1T for information on well dimensions, imposed loads and details of 13 person (stretcher) MRLi lifts.

Machine Room-Less
MRLi
13-10-2T
17/01/08