

THE *Goodsmaster*

GOODS LIFTS RANGE
500 - 1500kg



*GIVING ROBUST AND
DEPENDABLE FLOOR TO FLOOR
MOVEMENT OF GOODS*

Goodsmaster

GOODS LIFTS

● Choice of five models

Whether you are lifting palletised goods, large roll containers, warehouse stock, furniture or bulky goods, heavy electrical or industrial equipment, trolleys, sack barrows or washing machines, you can choose from five models with 500kg, 750kg, 1000kg or 1500kg capacity to suit your exact lifting requirements.

● Quick, simple installation

The Goodsmaster operates inside a rapidly-erected, structure supported framework which is easy to install virtually anywhere and requires minimal builder's work. No separate motor room or load-bearing wall or lift shaft is needed, which helps to keep costs down.

● Quick delivery

All the Goodsmaster models can be delivered in a few weeks and can be installed and working within a few days.

● Easy handling

Up to two-way entry (single or through car) on every floor to give most convenient access positions.

● Entrances

A single hinged steel door is supplied as standard on 1045mm wide lift cars. Double hinged steel doors are supplied as standard on 1305mm and 1445mm wide lift cars. All are finished in grey baked enamel. Collapsible concertina gates are available as an option on all models.

● Car entrance

A collapsible gate is fitted to the lift car entrance as standard.

● Lift enclosure

Sheet steel motor-room cabinet and shaft cladding (non fire rated) available as an optional extra.



Double hinged steel door on 1305 and 1445mm wide cars

- Large Roll Containers
- Furniture/Bulk
- Heavy Industrial Equipment
- Sack Barrows



- 1 Robust push buttons, fully automatic control
- 2 Grey baked enamel framework for long life
- 3 Electronically interlocked hinged steel doors
- 4 Easy-clean finish
- 5 Collapsible gate
- 6 Quiet and efficient powerful motor
- 7 Structure supported frame
- 8 Low pit or optional ramp
- 9 Concertina gate (optional)

Key Goods ■ Palletised Goods
 Rows ■ White Goods ■ Trolleys

INSTALLATION NOTES AND BUILDER'S WORK:

Builder's Work

Preliminaries

Preliminary builder's work is straightforward. All that is normally required is an appropriately-sized opening in each floor and a 415v electrical power supply.

We can provide your builder with exact builder's work details and drawings for your installation and, where necessary, liaise directly with the builder to ensure the whole operation runs smoothly.

After the Installation

Your builder will need to provide an enclosure around the Goodsmaster to protect against moving parts and conform with your local fire regulations. Permanent safe access to the motor must be provided to comply with current safety regulations. The lift installation and associated builder's work should comply with the Supply of Machinery (Safety) Regulations 1992. Once the builder's work has been completed we then return to site to commission, test and 'CE' mark the lift.

At this stage we will show you how to use the lift properly.

Installation Notes:

Headroom: This is the floor to ceiling height at the top floor served.

Shaft: These dimensions give the minimum inside shaft width and depth that must be provided to enable your Goodsmaster to be installed.

Pit: The Goodsmaster normally serves at floor level and would require a pit in the lowest floor. If you are unable to provide a pit, the Goodsmaster can be installed to serve at 150mm above the lowest floor and a ramp will need to be provided by your builder.

STANDARD STOCK DIMENSIONS

ALL DIMENSIONS ARE NOMINAL AND IN MM

MODEL	CAPACITY	CAR			ENTRANCE		SERVING HEIGHT	SHAFT		PIT (RAMP) DEPTH	HEAD-ROOM
		WIDTH	DEPTH	HEIGHT	WIDTH	HEIGHT		WIDTH	DEPTH		
500B	500kg	1045	1235 [†]	2000	1010	2000	FLOOR	1650	1500	150 [#]	2800
500EU	500kg	1305	1235 [†]	2000	1305	2000	FLOOR	1950	1500	150 [#]	2800
750B	750kg	1045	1235 [†]	2000	1010	2000	FLOOR	1650	1500	150 [#]	2800
750EU	750kg	1305	1235 [†]	2000	1305	2000	FLOOR	1950	1500	150 [#]	2800
750S	750kg	1045	1735 [†]	2000	1010	2000	FLOOR	1650	2000	150 [#]	2800
1000B	1000kg	1045	1235 [†]	2000	1010	2000	FLOOR	1650	1500	150 [#]	2800
1000EU	1000kg	1305	1235 [†]	2000	1305	2000	FLOOR	1950	1500	150 [#]	2800
1000S	1000kg	1045	1735 [†]	2000	1010	2000	FLOOR	1650	2000	150 [#]	2800
1000D	1000kg	1445	1435 [†]	2000	1410	2000	FLOOR	2050	1700	150 [#]	2800
1000DS	1000kg	1445	1735 [†]	2000	1410	2000	FLOOR	2050	2000	150 [#]	2800
1500D	1500kg	1445	1435 [†]	2000	1410	2000	FLOOR	2050	1700	150 [#]	3000
1500DS	1500kg	1445	1735 [†]	2000	1410	2000	FLOOR	2050	2000	150 [#]	3000


Important Notes:- Motor Housing and Pit/Ramp

* **MOTOR HOUSING:** It will be necessary to provide access for servicing via lockable double hinged doors for the full depth of the lift shaft. These are available as an optional extra.

PIT OR RAMP: The Goodsmaster normally serves at floor level and would require a pit in the lowest floor. If you are unable to provide a pit, the Goodsmaster can be installed to serve at 150mm above the lowest floor and a ramp will need to be provided by your builder.

† **CAR DEPTH:** With a through car entrance arrangement, the inside car depth reduces by 25mm nominal.

N.B. Consideration must be given to protect any accessible space beneath the bottom of the lift shaft. We would be pleased to provide further information if required.

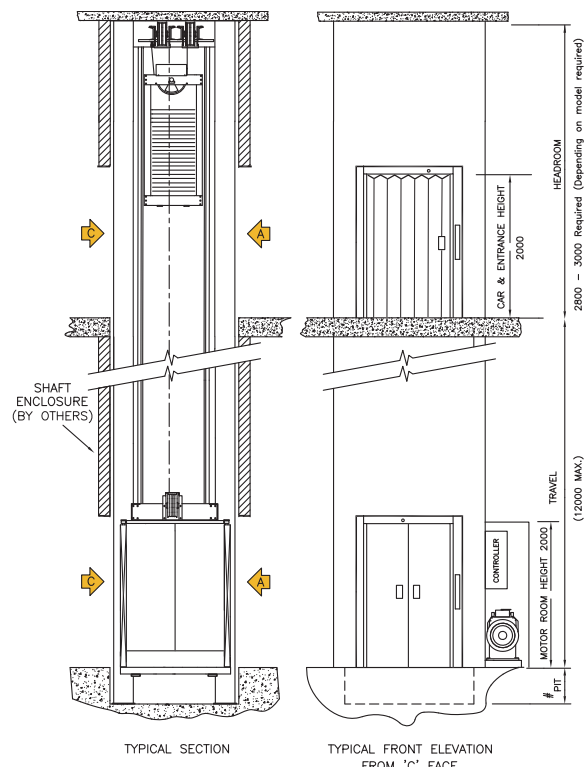

Choice of entrance arrangements

Single or through car entry on every floor is possible, giving you maximum access to the lift

